


ZOUCHseal 260 High Density PVC Foam Sealant

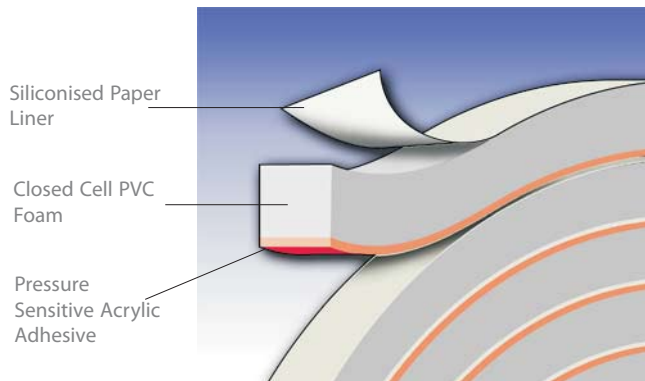

Description

ZOUCHseal 260 is primarily a foam compression sealant. The product is available in grey or black. The foam is predominantly closed cell and is of medium hardness foam. An acrylic pressure sensitive adhesive is coated on one side, and the product has a paper release liner on the other non-adhesive face.

ZOUCHseal 260 will act as a water-seal and air/dust seal when compressed. Ideal for higher load bearing applications and for vibration dampening.

PRODUCT BENEFITS

- Minimum 30% compression required to effect a water seal
- Service temperature $-30\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$
- Application temperature: $+10\text{ }^{\circ}\text{C}$ to $+40\text{ }^{\circ}\text{C}$
- Shelf life of 1 year
- Coated on one side with a high quality pressure sensitive acrylic adhesive
- Good resistance to dilute acids & alkalis
- Paper release liner on the non-adhesive face, reducing dimensional change during application
- Very good Ultra violet {UV} Light resistant
 - Resistance to abrasion, corrosion and moisture
 - Suitable for indoor and outdoor environments
- No known hazards associated with this product
- Pre-determined dimensional sealant reduces waste
- Clean to use
- Clean edge finish

Seal & vibration dampener

Applications

- ▶ Forms a compression water seal
- ▶ For preventing electrolytic corrosion
- ▶ For heavy duty cushioning
- ▶ For high load bearing applications
- ▶ Forms a compression air / dust seal
- ▶ For gap filling
- ▶ For anti slip mounting



ZOUCHseal 260 - Typical Properties

ACCREDITATIONS

- Conforms to European Directive 2000/53 EC (lead, chromium VI, mercury, cadmium free)

TECHNICAL PROPERTIES

	Unit	Nominal Value	Test Method
Shore Hardness {OO} Scale	"OO"	50	F16
Force To Compress By 30 %	Ncm ⁻²	6.3	F4
Compression Deflection After 1 Minute	Ncm ⁻²	5.3	F4
10 Minute 180 ° Peel Adhesion	N/25mm	5	F9
Tensile Strength	Ncm ⁻²	88	F17
Elongation At Break	%	>140	F17
Thermal Conductivity (k)	Wm ⁻¹ K ⁻¹	0.043	Lee's Disc

STANDARD PRESENTATION

- Formats: Logs, Rolls, Die Cuts, Spools
- Thickness: 0.8; 1.5; 2.5; 3.0; 4.5; 6.0 mm
- Core: 76mm plastic core

RECOMMENDATIONS

Surfaces must be clean, dry, free from grease and dirt.

Recommended cleaning agent is Propan-2-ol, {IPA}. Please note manufacturer's safety instructions should be followed and customers are recommended to ensure compatibility of the solvent with their substrate.

Ideal bonding substrates are those which are: clean, dry, flat, smooth, dust free & non-porous

Low temperatures may increase the risk of condensation, reducing the tack of the product.

Life expectancy will vary with temperature and humidity.

Product may be applied by hand direct from a roll applying even pressure.

Customers are recommended to make their own assessment of our products under their own conditions, for their own requirements.

The data and details in this leaflet were correct and up-to-date at the time of printing and are intended to provide information on our products and their possible applications. This leaflet is not a specification and does not assure specific product characteristics or make reference to the suitability of the products for a definite application. Because Zouch Converters cannot anticipate or control every application, we strongly recommend testing of this product under individual application conditions.